


BIVALVIA SPECIFICATIONS

DESCRIPTION

- Hand-crafted stained glass pieces of varying lengths make up the Bivalvia pendant chandelier.
- Customized dimension, shape, and finish of the ceiling plate
- Lamps can be combined in multiple configurations in which each element is positioned at different heights.
- Each light fixture is customized and made to order

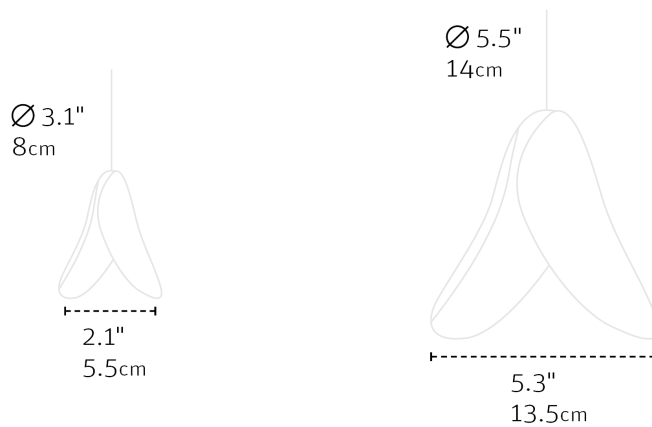

GENERAL INFORMATION

SKU:	SML-1504
Collection:	BIVALVIA
Class:	Ceiling, Chandelier
Materials:	Glass, metal

UL, CSA ID

E300046-0002-C00

COMPONENTS

Pendant sizes:	Small: D=3.1" I 8cm Open: 2.1" I 5.5cm Large: D= 5.5" I 14cm Open: 5.3" I 13.5cm
Weight:	Small: 0.7 lb I 0.3kg. (Single pendant, including all parts) Large: 1 lb I 0.45kg
Ceiling plate shape	Square I Round I Rectangle I triangle I ring I oval
Ceiling plate material	Tin Metal, 0.04" thick I 0.1cm
Ceiling plate size:	Width + Length: Made to order I Depth: 1.575In I 4cm
Ceiling plate finish :	17 options to choose from: Finish options
Cords	Tinned copper
Cords length	Up to 35ft long I 10m. Pre-set in cascading different lengths Adjustable
Compatible with:	Slope I peaked I skylight I beam

LAMPING SPEC

When using two different sizes, all pendants will come with Led G4 bulbing.

Light source	Silicone LED bulb G4	Led G9
Image		

Wattage (single bulb)	2W	5W
Input voltage	AC 110-240V	AC 110-240V
Lumens (single bulb)	170 lumens	450 lumens
Color temperature:	3000k warm white	3000k warm white
CRI	80	>80
Dimming	Yes	Yes
Beam Angle	360°	360°
Bulb included	Yes	Yes
Driver requires:	Yes, Included	No
Lifespan(Hrs)	>15,000	30,000
Maintenance	Low, Easy to replace, Available in stores	Low, Easy to replace, Available in stores

ELECTRICAL REQUIREMENTS - INSTALLATION

Max wattage (single bulb):	2w
Voltage:	120v, 110
Location:	Dry location only
Power Source	Hardwired

Wiring:	Single electrical outlet
Dimming:	Dimmable, any dimming switch, TRIAC included
Electrical rating:	Input: 120Vac, 60Hz, 0.61A.
Power Source:	Hardwired
Assembly Required:	No
Installation instructions:	https://did.li/XwuTY
Ceiling back plate:	https://did.li/Gyqaa
UL CSA Approval	https://did.li/2sHIC